




Micro Diameter



Type No. 型號	Diameter R	Flute Length 刃長 l ₁	O. A. L. 全長 l ₃	Shank Dia. 柄徑 d ₂
LR2AL010F	R 0.5	2	75	4
LR2AL015F	R 0.75	3	75	4
LR2AL020F	R 1	4	75	4
LR2AL030F	R 1.5	6	75	4
LR2AL030-3	R 1.5	6	75	3
LR2AL040F	R 2	8	75	4
LR2AL010-75-6	R 0.5	2	75	6
LR2AL015-75-6	R 0.75	3	75	6
LR2AL020-75-6	R 1	4	75	6
LR2AL030-75-6	R 1.5	6	75	6
LR2AL040-75-6	R 2	8	75	6
LR2AL050-75-6	R 2.5	10	75	6
LR2AL060-75-6	R 3	12	75	6
LR2AL080-75	R 4	16	75	8
LR2AL020-100-6	R 1	4	100	6
LR2AL030F-100	R 1.5	6	100	4
LR2AL030-100-3	R 1.5	6	100	3
LR2AL030-100-6	R 1.5	6	100	6
LR2AL040F-100	R 2	8	100	4
LR2AL040-100-6	R 2	8	100	6
LR2AL050-100-6	R 2.5	10	100	6
LR2AL060-100-6	R 3	12	100	6
LR2AL080-100	R 4	16	100	8
LR2AL100-100	R 5	20	100	10
LR2AL120-100	R 6	24	100	12
XLR2AL060-6	R 3	12	150	6
XLR2AL080	R 4	16	150	8
XLR2AL100	R 5	20	150	10
XLR2AL120	R 6	24	150	12
XLR2AL160	R 8	32	150	16
XLR2AL200	R 10	40	150	20

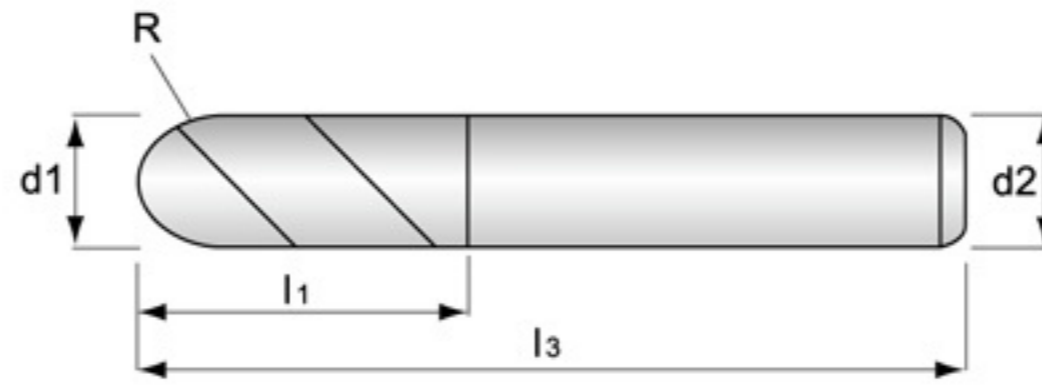

High Speed Cutting
& High Hard Cutting

d1 (mm)	d1(mm) tolerance
R1	±0.01
R1.5	±0.01
R2	±0.01
R2.5	±0.01
R3	±0.01
R4	±0.01
R5	±0.01
R6	±0.015
R8	±0.02
R10	±0.02

Shank(mm) (h6)	d2(mm) tolerance
Ø 6	⁰ _{-0.008}
Ø 8	⁰ _{-0.008}
Ø 10	⁰ _{-0.009}
Ø 12	⁰ _{-0.011}
Ø 16	⁰ _{-0.011}
Ø 20	⁰ _{-0.013}